


IMPG

磁浮子液位传感器 Electromagnetic level sensor

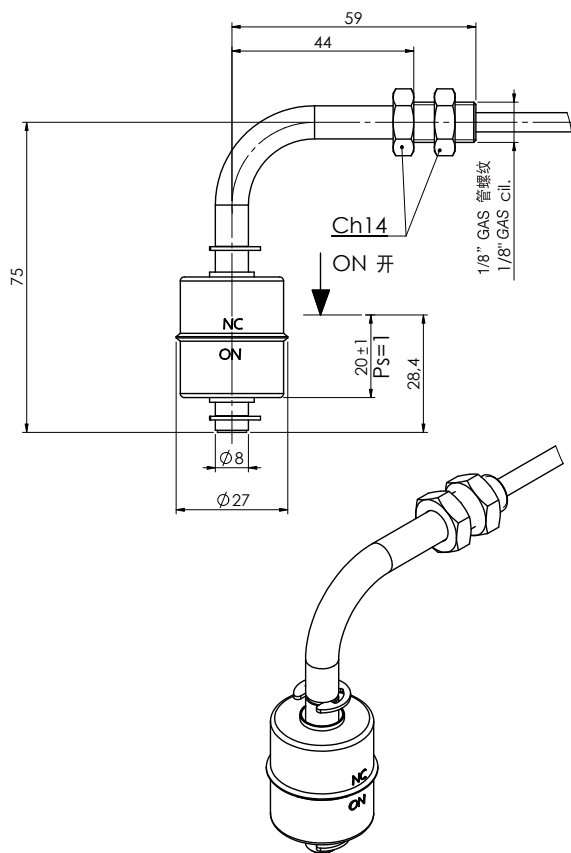

Ex 可要求ATEX版本
Version ATEX available on request

HT 可要求高温版本
Version High Temperature available on request



请联系我们的客户服务了解定制版本。（不同长度、温度 > 100°C 等）
请参考2012版《Euroswitch传感器目录》中的“总体说明”了解正确的使用方法。

For customized version (different length, temperature > 100°C, etc.) please contact Euroswitch.
For a correct use please refer to "General Notes" in the Euroswitch sensors catalogue, edition 2012.

测量介质	水 - 油 - 酸液 - 汽油 (可要求液体食物)
固定	G1/8"圆柱形
杆	AISI 304不锈钢(可要求316)
螺帽	AISI不锈钢
浮球	AISI 316不锈钢
Seeger	AISI 316不锈钢
电气连接	可要求线路
触点类型	簧片 开/关(SPDT)
开关最大容量	40 W (3 W SPDT)
开关最大电流	1 A (0.25 A SPDT)
开关最大电压	<250 Vac (50Vac SPDT)
动作类型	1B
污染情况	正常
液体比重	> 0.8
工作温度	-15°C / +100°C (HT -20°C / +200°C)

Use	Water - Oil - Acids - Fuels (Alimentary liquids on request)
Fixing	G 1/8" cylindrical
Stem	Stainless steel aisi 304 (316 on request)
Nut	Stainless steel aisi
Float	Stainless steel aisi 316
Seeger	Stainless steel aisi 316
Electrical connection	Cable on request
Type of contact	Reed N.O./N.C. (SPDT)
Max switch. capacity	40 W (3W SPDT)
Max switch. current	1A (0.25A SPDT)
Max switch. voltage	< 250 Vac (50V SPDT)
Action type	1B
Pollution situation	normal
Fluid specific weight	> 0.8
Working temperature	-15°C / +100°C (HT -20°C / +200°C)